



胶壳: MOLEX 430201800
插针: MOLEX 430310004






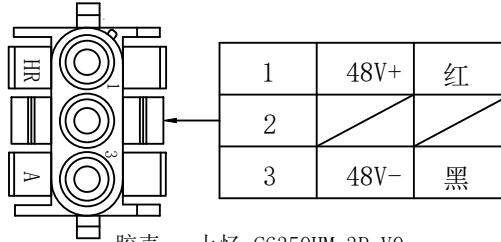








胶壳: 上忆 C6350HM-3P-V0
插针: 上忆 C6350M-TBe (公)



Adapter

技术参数 Technical Data

极数 No. of poles	10
直流母线电压 DC Link Voltage UDC(V)	48
额定功率 Rated Power PN (W)	750
额定转矩 Rated Torque T _N (N.m)	2.39
额定转速 Rated Speed n _N (rpm)	3000
额定电流 Rated Current I _N (A)	19.2
最大转矩 Maximum torque T _m (N.m)	7.17
最大电流 Maximum Current I _m (A)	62.7
连续静态转矩 Standstill torque T _s (N.m)	2.63
连续静态电流 Standstill Current I _s (A)	21.1
转矩常数 Torque constant K _t (Nm/A)	0.137
转动惯量 Rotor moment of inertia J _m (Kg.cm ²)	0.85
最大径向力 Max. radial force F _r (N)	392
最大轴向力 Max. axial force F _a (N)	147
反馈装置 Feed back device	AM-S17Bit
绝缘等级 Insulation class	F
防护等级 Protection level	IP65
工作制 Working system	S3
重量 Weight (Kg)	2.6

				材料		X			深圳市步科电气有限公司					
DIMENSIONS IN MM				表面处理		ISO 2768-mk								
				一般公差										
				设计	Fangping	20240909	iSMK80-075-DMAK-EA-000-1V1							
				审核										
	删除线颜色		20240909	fp	确认			图号	X					
版本	标记	日期	姓名	FP		工艺		比例	1:1	数量	/	重量	/	